


# ARCHITECTURAL FX

Technicians of Light

## Neon 0410 SV IP65

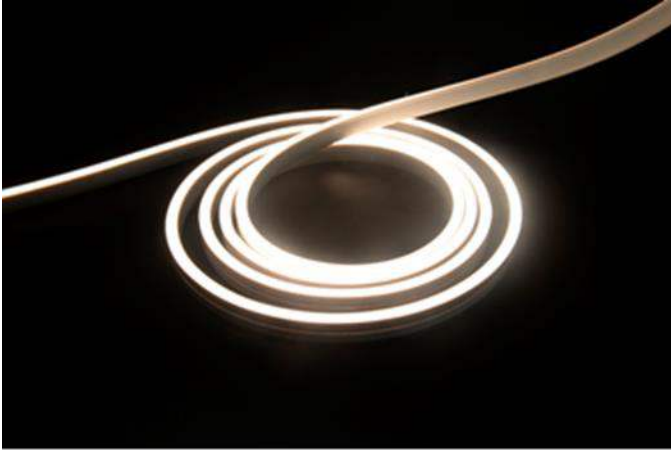

### General Information

Flexible IP65 with uniform lighting surface

High light transmittance, environmental silicone material, integrated extrusion molding technology, IP65.

Power 7.2w/m

Step Length 41.66mm

24v DC Constant Voltage


Beam angle: 120°

CRI >90

Lifespan L70 ≥ 36,000 hours

Dimmable – DALI, DMX, 0-10v


AFX Code	w/m	CCT (k)	lm/m	CRI	Step length (mm)	Max single length (m)	Lifespan (hrs)
0410	7.2w	2300k	240	>90	41.66	5m	L70 >36,000
0410	7.2w	2700k	250	>90	41.66	5m	L70 >36,000
0410	7.2w	3000k	260	>90	41.66	5m	L70 >36,000
0410	7.2w	4000k	270	>90	41.66	5m	L70 >36,000
0410	7.2w	Red	R 620-630nm	-	41.66	5m	L70 >36,000
0410	7.2w	Green	G 525-530nm	-	41.66	5m	L70 >36,000
0410	7.2w	Blue	B 465-470nm	-	41.66	5m	L70 >36,000
0410	7.2w	Yellow	Y 587-592nm	-	41.66	5m	L70 >36,000

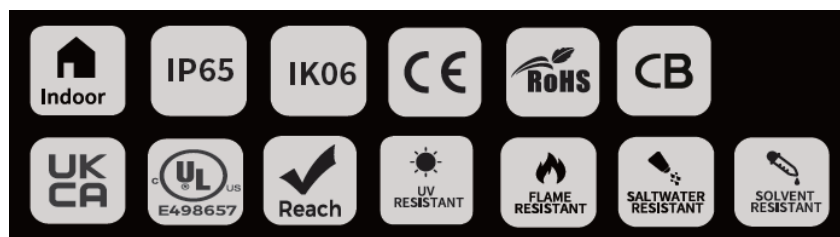



(Example full Luminaire Reference: Neon 0410 SV 2700k 7.2w IP65)

Compatible Accessories (See Accessories data sheet for full details)

## ▼ Bending application

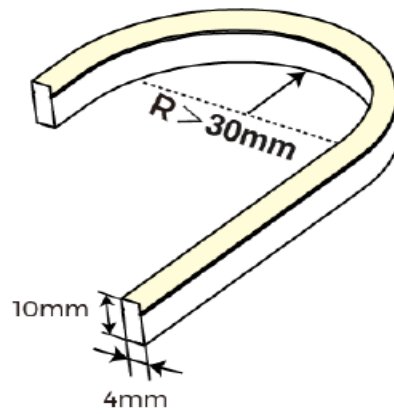

## IP65 metal clip + silicone end cap

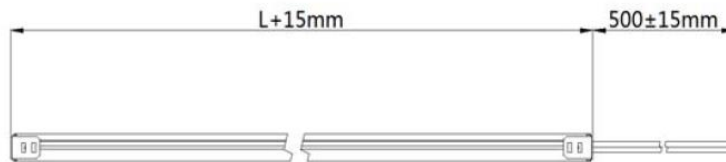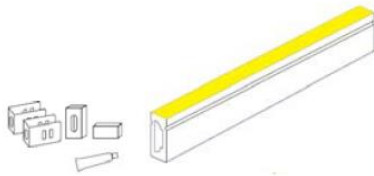

## Aluminum mounting channel – 1000mm length or 5No Clips per m;

