


ARCHITECTURAL FX

Technicians of Light

Neon 0612 SV IP65

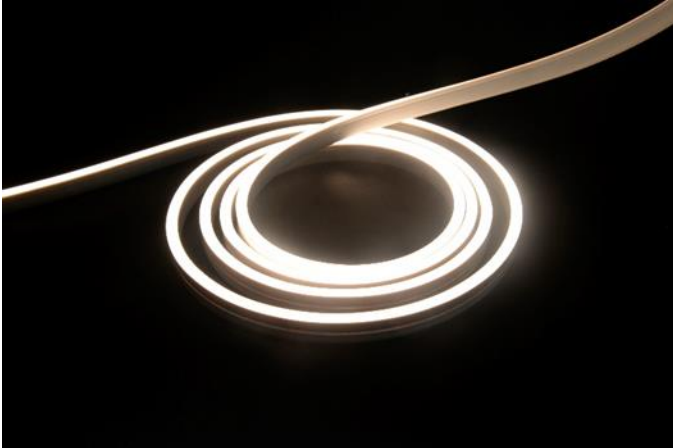

General Information

Flexible IP65 with uniform lighting surface

High light transmittance, environmental silicone material, integrated extrusion molding technology, IP65.

Power 9.6w/m

Step Length 50mm

24v DC Constant Voltage

Beam angle: 120°


CRI >90

Lifespan L70 ≥ 36,000 hours


Dimmable – DALI, DMX, 0-10v

AFX Code	w/m	CCT (k)	lm/m	CRI	Step length (mm)	Max single length (m)	Lifespan (hrs)
0612	9.6w	2300k	250	>90	50mm	5m	L70 >36,000
0612	9.6w	2700k	280	>90	50mm	5m	L70 >36,000
0612	9.6w	3000k	280	>90	50mm	5m	L70 >36,000
0612	9.6w	4000k	280	>90	50mm	5m	L70 >36,000
0612	9.6w	Red	R 620-630nm	-	50mm	5m	L70 >36,000
0612	9.6w	Green	G 525-530nm	-	50mm	5m	L70 >36,000
0612	9.6w	Blue	B 465-470nm	-	50mm	5m	L70 >36,000
0612	9.6w	Yellow	Y 587-592nm	-	50mm	5m	L70 >36,000




(Example full Luminaire Reference: Neon 0612 SV 2700k 7.2w IP65)

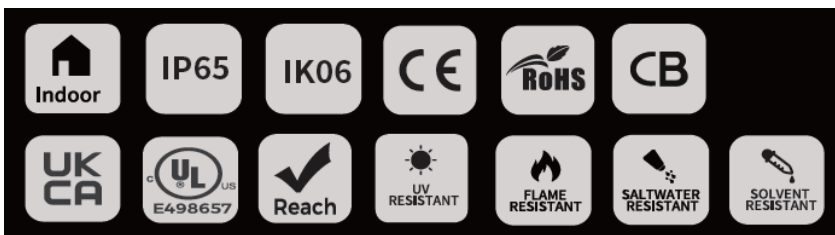

Compatible Accessories (See Accessories data sheet for full details)

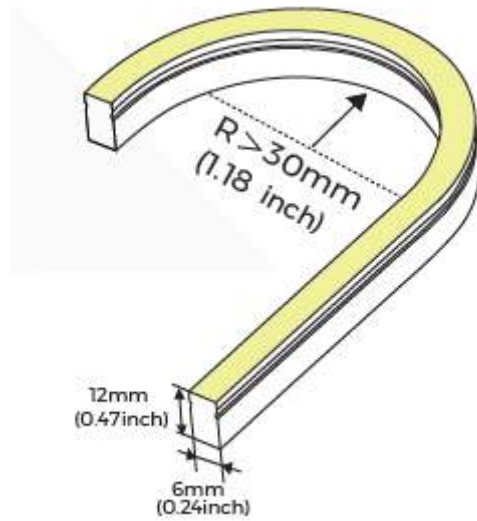

• IP65 Metal cap-top outlet

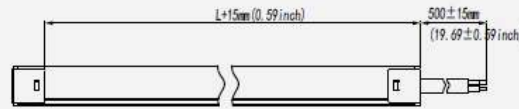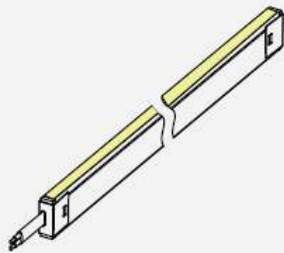

Aluminum mounting channel – 1000mm length or 5x Clips per m (Recommended)

