


## Platin Tube DTW White IP68

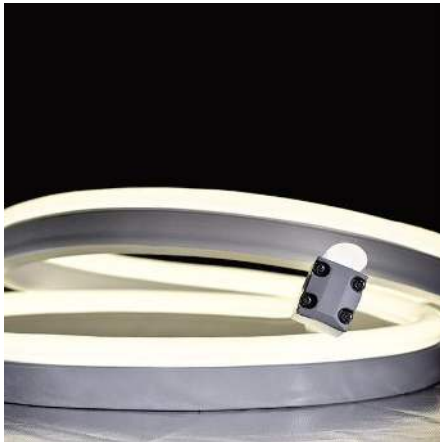

### General Information


Flexible LED strip in UV-, chlorine-, salt water, solvent and heat-resistant special silicone for indoor- and outdoor use, IP68  
12w, 144 LED, 265 lumens per m  
Single Colour 1900 – 3200k (Finished CCT)  
Cutable every 83.3mm  
LED spacing: 6.94mm  
Width 11.5mm x Height 21mm  
Easy installation due to solder-free connectors.  
Bending diameter: 120mm  
Max Single length 10m, in-feeder connector and an end cap as provided  
Customized length with sealed connectors on request.

### Electrical & output data

Input Voltage 24 Volt DC Constant Voltage (23 V min, 25 V max)  
Ambient operating Temperature range: -45 to +70 °C  
Storage temperature Ts min = -30°C, Ts max = 85°C  
Dimmable – Mains (Triac), 0-10v, Dali, DMX  
Protected against electrostatic discharge +/- 2,000 V

### Lifetime and Warranty (See full Architectural FX total system warranty for more detail)

Lifespan L70: 36,000 hours  
Product availability lifetime – 3 years from last order  
End of Lifetime guarantee 5 years  
The above data are typical values. Due to tolerances in the production process and electrical components, values for light output and electrical power can vary up to 10%.




Generic Product	Product Type	Bend Orientation	Colour (Finished CCT)	w/m	Mounting Accessory	Cable Entry
Platin	White Round	Top	1900-3200k	12w	MC - 50mm Clip	End (Standard)
					MP – Mounting Profile	Side Left - SL
						Side Right – SR
						Rear - R

**Example:**

**Platin TVQ DTW 12w MC E (Custom length to suit project to be advised)**

**Customized length with sealed connectors on request.**

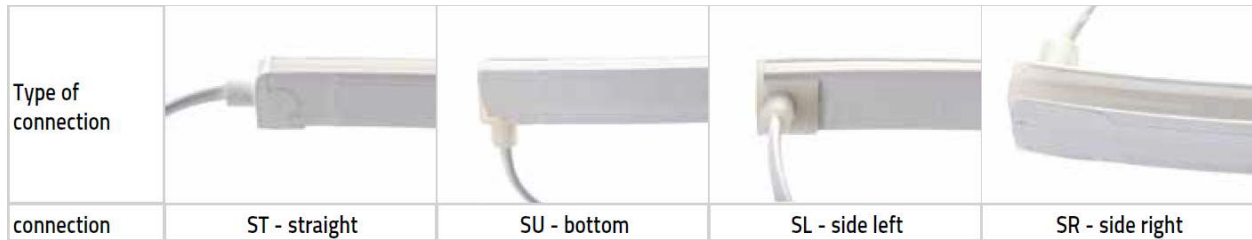

**\*IP20 quick connects available, along with quick seal end entry connections from stock**

**Compatible Accessories (See Accessories data sheet for full details)**



**Note: Do not twist or bend against bend orientation on install**

