


# ARCHITECTURAL FX

Technicians of Light

## Platin Ultra TVQ (Top Bend) White IP68

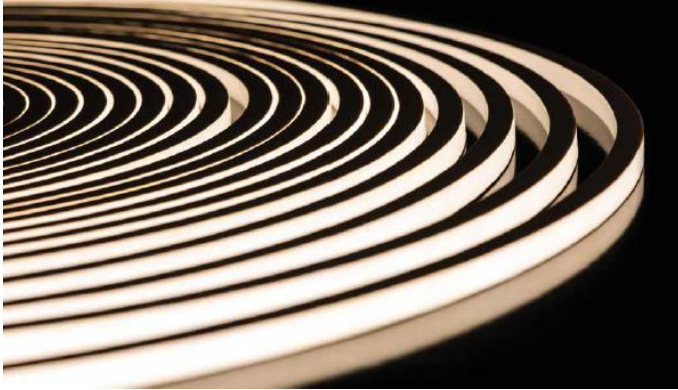

### General Information

Flexible LED strip in UV, chlorine, saltwater, solvent and heat-resistant special silicone for indoor- and outdoor use, IP68  
15w, 815 lumens per m

Single Colour White 2200k, 2400k, 2700k, 3000k, 4000k (Finished CCT)

Cutable every 55.6mm

Width 16mm x Height 17mm

Easy installation due to solder-free connectors.

Bending diameter: 300mm

Max Single length 5m, in-feeder connector and an end cap as standard

Customized length with sealed connectors on request.

Constant light output and extended lifetime due to an integrated constant current source on the circuit board.

### Electrical & output data

Input Voltage 24 Volt DC Constant Voltage (23 V min, 25 V max)

Ambient operating Temperature range: -40 to +70 °C

Storage temperature Ts min = -30°C, Ts max = 85°C

Dimmable – Mains (Triac), 0-10v, Dali, DMX

Protected against electrostatic discharge +/- 2,000 V

### Lifetime and Warranty (See full Architectural FX total system warranty for more detail)

Lifespan L70: 50,000 hours

Product availability lifetime – 3 years from last order

End of Lifetime guarantee 5 years

The above data are typical values. Due to tolerances in the production process and electrical components, values for light output and electrical power can vary up to 10%.




| Generic Product | Product Type | Bend Orientation | Colour (Finished CCT) | w/m | Mounting Accessory    | Cable Entry     |
|-----------------|--------------|------------------|-----------------------|-----|-----------------------|-----------------|
| Platin          | Ultra TVQ    | Top              | 2200k                 | 15w | MC - 50mm Clip        | End (Standard)  |
| Platin          | Ultra TVQ    | Top              | 2400k                 | 15w | MP – Mounting Profile | Side Left - SL  |
| Platin          | Ultra TVQ    | Top              | 2700k                 | 15w |                       | Side Right – SR |
| Platin          | Ultra TVQ    | Top              | 3000k                 | 15w |                       | Rear - R        |
| Platin          | Ultra TVQ    | Top              | 4000k                 | 15w |                       |                 |

**Example:**

**Platin Ultra TVQ 2700k 15w MC E (Custom length to suit project to be advised)**

**Customized length with sealed connectors on request.**

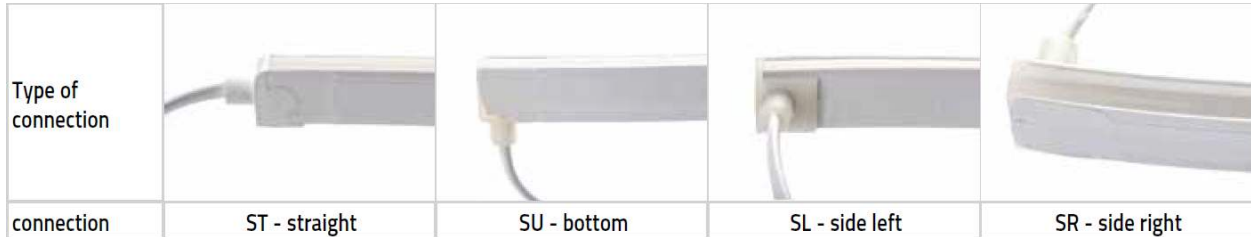

**\*IP20 quick connects available, along with quick seal end entry connections from stock**

**Compatible Accessories (See Accessories data sheet for full details)**



**Note: Do not twist or bend against bend orientation on install**

