


ARCHITECTURAL FX

Technicians of Light

Sauna TVQ (Top Bend) Tunable White IP68

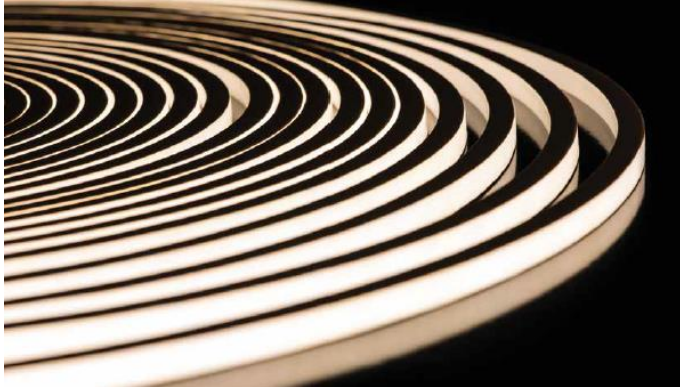

General Information

Flexible LED strip in UV-, chlorine-, saltwater, solvent and heat-resistant special silicone for indoor and outdoor use, IP68
6w, 245 lumens per m (2000k @ 110lm/m + 3200k @ 135lm/m)

Tunable White 2000 - 3200k (Finished CCT)

Cuttable every 83.3mm

Width 16mm x Height 17mm

Bending radius: 300mm

Max Single length 10m, in-feeder connector and an end cap as provided

Customized length with sealed connectors on request.

Constant light output and extended lifetime due to an integrated constant current source on the circuit board.

Electrical & output data

Input Voltage 24 Volt DC Constant Voltage (23 V min, 25 V max)

Ambient operating Temperature range: -45 to +90 °C

Storage temperature Ts min = -30°C, Ts max = 85°C

Dimmable – Mains (Triac), 0-10v, Dali, DMX

Protected against electrostatic discharge +/- 2,000 V

Lifetime and Warranty (See full Architectural FX total system warranty for more detail)

Lifespan L70: 36,000 hours

Product availability lifetime – 3 years from last order

End of Lifetime guarantee 5 years

The above data are typical values. Due to tolerances in the production process and electrical components, values for light output and electrical power can vary up to 10%.




Energy efficiency class **B**

Generic Product	Product Type	Bend Orientation	Colour (Finished CCT)	w/m	Mounting Accessory	Cable Entry
Sauna	TVQ White	Top	2000 - 3200k	6w	MC - 50mm Clip	End (Standard)
					MP – Mounting Profile	Side Left - SL
						Side Right – SR
						Rear - R

Example:

Sauna TVQ TW 2000 - 3200k 6w MC E (Custom length to suit project to be advised)

Customized length with sealed connectors on request.

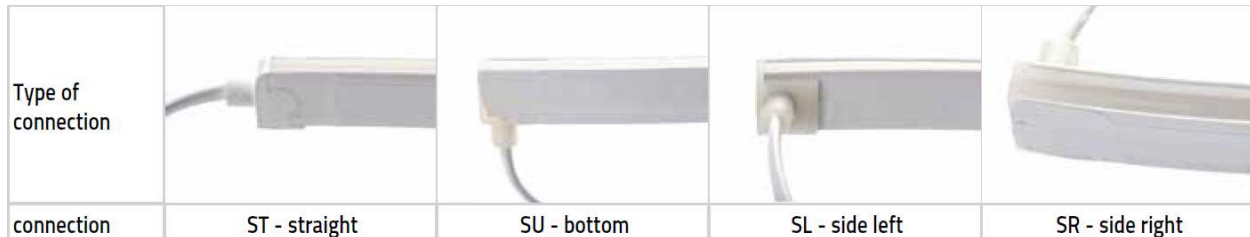

Compatible Accessories (See Accessories data sheet for full details)



Note: Do not twist or bend against bend orientation on install

