

ARCHITECTURAL FX

Technicians of Light

Sauna TVQ (Top Bend) White IP68



General Information

Flexible LED strip in UV-, chlorine-, saltwater, solvent and heat-resistant special silicone for indoor and outdoor use, IP68
6w, 280 lumens per m
Single Colour White 2200, 2400, 2700, 3000k, 4000k (Finished CCT)
Cuttable every 55.6mm
LED spacing: 9.3mm
Width 16mm x Height 17mm
Bending radius: 300mm
Max Single length 10m, in-feeder connector and an end cap as provided
Customized length with sealed connectors on request.
Constant light output and extended lifetime due to an integrated constant current source on the circuit board.

Electrical & output data

Input Voltage 24 Volt DC Constant Voltage (23 V min, 25 V max)
Ambient operating Temperature range: -45 to +90 °C
Storage temperature Ts min = -30°C, Ts max = 85°C
Dimmable – Mains (Triac), 0-10v, Dali, DMX
Protected against electrostatic discharge +/- 2,000 V

Lifetime and Warranty (See full Architectural FX total system warranty for more detail)

Lifespan L70: 36,000 hours
Product availability lifetime – 3 years from last order
End of Lifetime guarantee 5 years
The above data are typical values. Due to tolerances in the production process and electrical components, values for light output and electrical power can vary up to 10%.




Generic Product	Product Type	Bend Orientation	Colour (Finished CCT)	w/m	Mounting Accessory	Cable Entry
Sauna	TVQ White	Top	2200k	6w	MC - 50mm Clip	End (Standard)
Sauna	TVQ White	Top	2400k	6w	MP – Mounting Profile	Side Left - SL
Sauna	TVQ White	Top	2700k	6w		
Sauna	TVQ White	Top	3000k	6w		Side Right – SR
Sauna	TVQ White	Top	4000k	6w		Rear - R

Example:

Sauna TVQ 2700k 6w MC E (Custom length to suit project to be advised)

Customized length with sealed connectors on request.

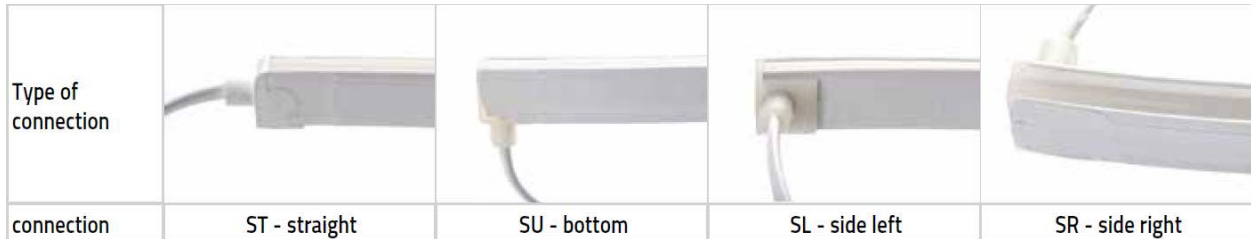

Compatible Accessories (See Accessories data sheet for full details)



Note: Do not twist or bend against bend orientation on install

