


Integrate COF TW, RGBW, RGBW SPI IP20 (Homogenous)

General Information

- Flexible LED strip IP20 (IP65 on request)
- 24v DC Constant Voltage
- Beam angle: 120°
- CRI >90
- R9 >65
- Homogenous
- Cut Increments
15w/m Tunable White 62.5mm
15w/m RGBW 83.3mm
15w/m RGBW SPI 50mm
- Lifespan L70: ≥ 30,000 hours (Tunable White)
Lifespan L70: ≥ 26,000 hours (RGBW)
Lifespan L70: ≥ 50,000 hours (RGBW SPI)
- Dimmable – DALI, DMX, SPI
- Max Ambient operating temperature (15/m 50°C)
- Integrate fixtures IP40
- 5 Year warranty

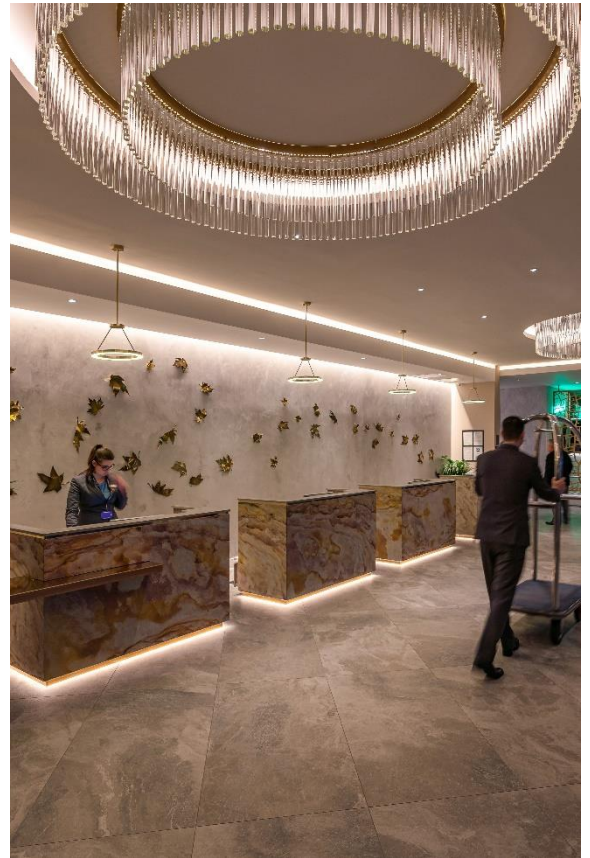

Integrate LED Code	CCT	12w/m	15w/m
		lm/m	lm/m
COF TW	2700 – 6500k	x	1360
COF RGBW	RGBW	X	600
COF RGBW SPI	RGBW SPI	462	x



About the Light source:

24v, flexible LED strip with reflective, white surface and 3M adhesive tape on the back. Homogeneous light source for fixtures with Opal covers <15mm from LED to Opal cover. Bridgelux LEDs of the highest quality. 120° beam angle.

“One Bin Only” within 3 step MacAdam

Integrated Constant Current technology to guarantee Constant color and Intensity over from first to last LED over lifetime

About the Fixtures:

A portfolio of Aluminium Recessed, Surface Mounted, Suspended or Plaster-In profiles, covers and mounting accessories for Interior, Exterior architectural and commercial applications.