
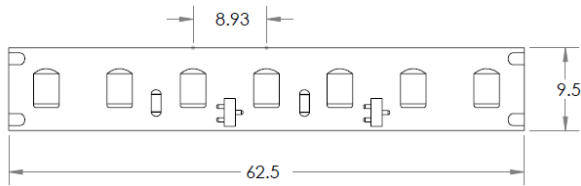


Integrate HEXL SW

General Information

- Flexible LED strip IP20
- 24v DC Constant Voltage
- Beam angle: 120°
- CRI >97
- R9 >90
- Increments 62.5mm
- LED pitch: 8.93mm
- Lifespan L90/B10: ≥ 60,000 hours
- Dimmable – Mains (Triac) DALI, DMX, 0-10v
- Max Ambient operating temperature (4-15w/m 50°C, 20w/m 45°C, 32w/m 35°C)
- Available IP40, IP44, IP67
- 7 Year warranty (Limited to 5,000hrs per year running)

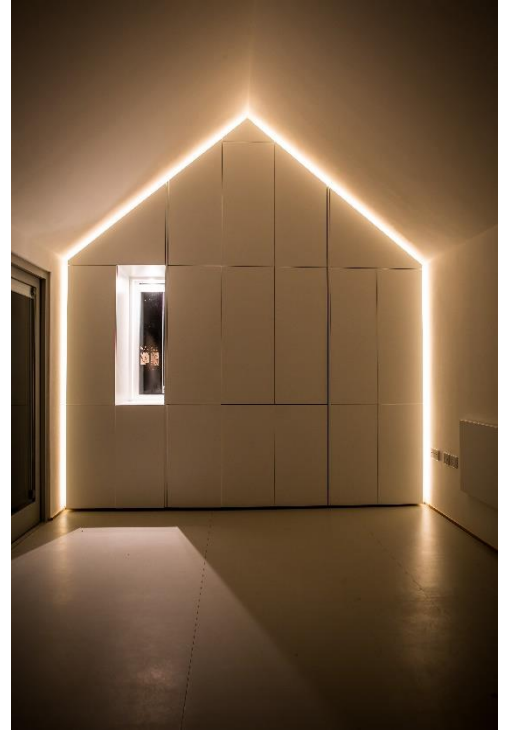

Integrate LED Code	CCT	4w/m	6w/m	11w/m	15w/m	20w/m	32w/m
		lm/m	lm/m	lm/m	lm/m	lm/m	lm/m
HEXL SW	2700k	417	590	1274	1869	2343	3846
HEXL SW	3000k	438	615	1380	1981	2490	3940
HEXL SW	3500k	460	640	1420	2050	2590	4090
HEXL SW	4000k	469	655	1430	2096	2630	4110
HEXL SW	5000k	470	670	1450	2120	2660	4200

Note: -40% light loss with Opal cover

About the Light source:

24v, flexible LED strip with reflective, white surface and 3M adhesive tape on the back. Homogeneous light source for fixtures with Opal covers <15mm from LED to Opal cover. Nichia LEDs of the highest quality. 120° beam angle.

“One Bin Only” within 3 MacAdam

Up to 145 lm/W, with a CRI up to 97 and R9 up to 90. TM30-15 Rf up to 91 and Rg up to 101.

Integrated Constant Current technology to guarantee Constant color and Intensity over from first to last LED over lifetime

About the Fixtures:

A portfolio of Aluminium Recessed, Surface Mounted, Suspended or Plaster-In profiles, covers and mounting accessories for Interior, Exterior architectural and commercial applications.

(See separate pdf catalogue and specification builder for options)