
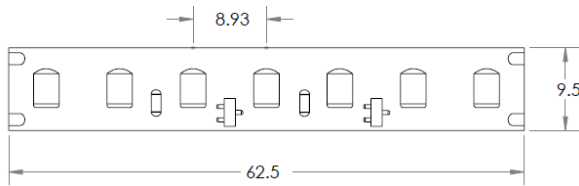


Integrate HPRO SW

General Information

- Flexible LED strip IP20
- 24v DC Constant Voltage
- Beam angle: 120°
- CRI >94
- R9 >74
- Increments 62.5mm
- LED pitch: 8.93mm
- Lifespan L80/B10: ≥ 60,000 hours
- Dimmable – Mains (Triac) DALI, DMX, 0-10v
- Max Ambient operating temperature (4-13w/m 50°C, 18-24w/m 45°C, 35w/m 35°C)
- Available IP40, IP44, IP67
- 7 Year warranty (Limited to 5,000hrs per year running)

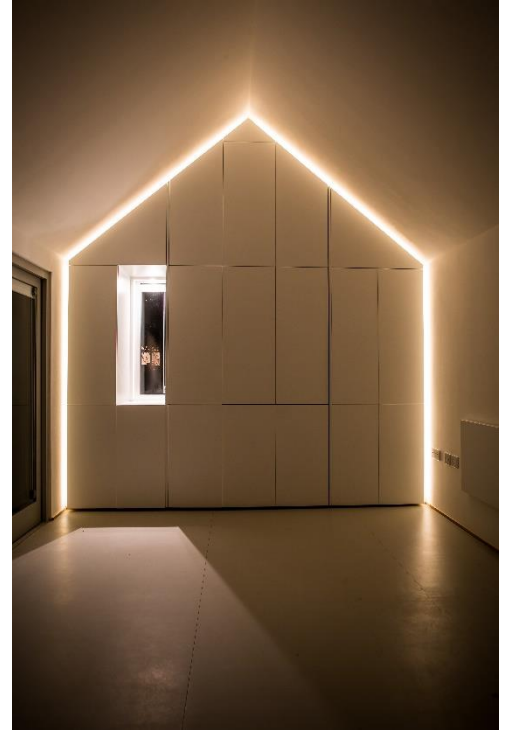

Integrate LED Code	CCT	4w/m	7w/m	13w/m	18w/m	24w/m	35w/m
		lm/m	lm/m	lm/m	lm/m	lm/m	lm/m
HPRO SW	2700k	330	580	1345	1927	2403	3775
HPRO SW	3000k	342	609	1414	1970	2550	4000
HPRO SW	3500k	350	620	1440	2080	2600	4040
HPRO SW	4000k	360	653	1470	2122	2680	4120
HPRO SW	5000k	380	660	1480	2190	2710	4170

Note: -40% light loss with Opal cover

About the Light source:

24v, flexible LED strip with reflective, white surface and 3M adhesive tape on the back. Homogeneous light source for fixtures with Opal covers <15mm from LED to Opal cover. Osram LEDs of the highest quality. 120° beam angle.

“One Bin Only” within 3 MacAdam

Tape efficacy up to 121 lm/W, with a CRI up to 94 and R9 up to 74. TM30-15 Rf up to 91 and Rg up to 101.

Integrated Constant Current technology to guarantee Constant color and Intensity over from first to last LED over lifetime

About the Fixtures:

A portfolio of Aluminium Recessed, Surface Mounted, Suspended or Plaster-In profiles, covers and mounting accessories for Interior, Exterior architectural and commercial applications.

(See separate pdf catalogue and specification builder for options)