
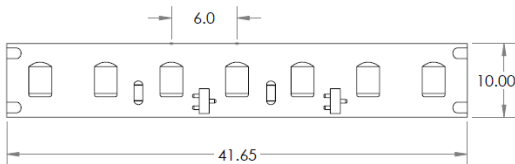


Integrate

Pro 90 168

General Information

- Flexible LED strip IP20
- 24v DC Constant Voltage
- Beam angle: 120°
- CRI >90
- R9 >55
- Increments 41.65mm
- LED pitch: 6mm
- Lifespan L70: ≥ 50,000 hours
- Dimmable – Mains (Triac) DALI, DMX, 0-10v
- Max Ambient operating temperature (7-14w/m 50°C, 19-24w/m 45°C, 33-48w/m 35°C)
- Available IP40, IP44
- 5 Year warranty

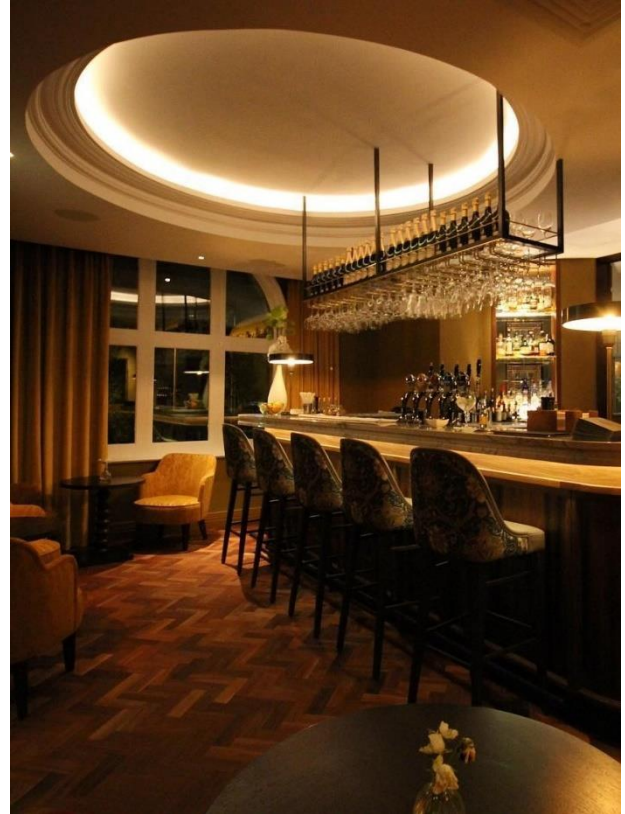

Integrate LED Code	CCT	7w/m	9w/m	14w/m	19w/m	24w/m	33w/m	48w/m
		lm/m	lm/m	lm/m	lm/m	lm/m	lm/m	lm/m
Pro 90 168	2200k	718	969	1400	1811	2251	3059	4204
Pro 90 168	2500k	750	1005	1452	1878	2334	3175	4433
Pro 90 168	2700k	771	1041	1504	1945	2417	3285	4518
Pro 90 168	3000k	824	1113	1608	2080	2585	3514	4833
Pro 90 168	4000k	931	1257	1816	2349	2914	3971	5453

Note: -40% light loss with Opal cover

About the Light source:

24v, flexible LED strip with reflective, white surface and 3M adhesive tape on the back. Homogeneous light source for fixtures with Opal covers <15mm from LED to Opal cover. Osram LEDs of the highest quality. 120° beam angle.

“One Bin Only” within 3 MacAdam.

Integrated Constant Current technology to guarantee Constant color and Intensity over from first to last LED over lifetime.

About the Fixtures:

A portfolio of Aluminium Recessed, Surface Mounted, Suspended or Plaster-In profiles, covers and mounting accessories for Interior, Exterior architectural and commercial applications.

(See separate pdf catalogue and specification builder for options)