


Integrate Pro 90 240

General Information

- Flexible LED strip IP20
- 24v DC Constant Voltage
- Beam angle: 120°
- CRI >90
- R9 >50
- Increments 33.3mm
- LED pitch: 4.16mm
- Lifespan L80 B10 ≥ 50,000 hours
- Dimmable – Mains (Triac) DALI, DMX, 0-10v
- Max Ambient operating temperature (4.8w-14.4w/m 50°C, 19.2w-24w/m 45°C)
- Available IP40, IP44
- 5 Year warranty

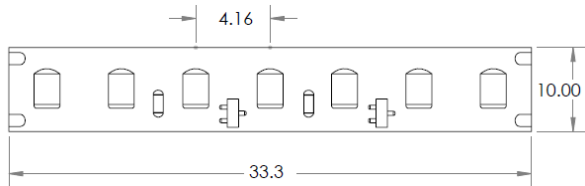

Integrate LED Code	CCT	4.8w/m	5.9w/m	7.2w/m	9.6w/m	14.4w/m	19.2w/m	21.6w/m	24w/m
		lm/m	lm/m	lm/m	lm/m	lm/m	lm/m	lm/m	lm/m
Pro 90 240	2200k	640	792	928	1283	1949	2594	3000	3236
Pro 90 240	2500k	662	818	998	1325	2012	2678	3100	3340
Pro 90 240	2700k	690	852	1040	1380	2096	2790	3230	3480
Pro 90 240	3000k	737	911	1112	1475	2240	2980	3454	3720
Pro 90 240	4000k	831	1097	1253	1662	2525	3360	3890	4190
Pro 90 240	5000k	923	1218	1390	1846	2805	3733	4322	4655

Note: -40% light loss with Opal cover

About the Light source:

24v, flexible LED strip with reflective, white surface and 3M adhesive tape on the back. Homogeneous light source for fixtures with Opal covers <15mm from LED to Opal cover. Osram LEDs of the highest quality. 120° beam angle.

“One Bin Only” within 3 MacAdam

Integrated Constant Current technology to guarantee Constant color and Intensity over from first to last LED over lifetime.

About the Fixtures:

A portfolio of Aluminium Recessed, Surface Mounted, Suspended or Plaster-In profiles, covers and mounting accessories for Interior, Exterior architectural and commercial applications.

(See separate pdf catalogue and specification builder for options)