
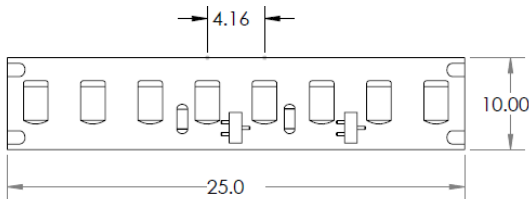


## Integrate Pro 95

### General Information

- Flexible LED strip IP20
- 24v DC Constant Voltage
- Beam angle: 120°
- CRI >95
- R9 >90
- Increments 25mm
- LED Pitch: 4.16mm
- Lifespan L80: ≥ 50,000 hours
- Dimmable – Mains (Triac) DALI, DMX, 0-10v
- Max Ambient operating temperature (3-14.4w/m 50°C, 16.4-20w/m 45°C)
- Integrate fixtures IP40, IP44
- **10 Year warranty**

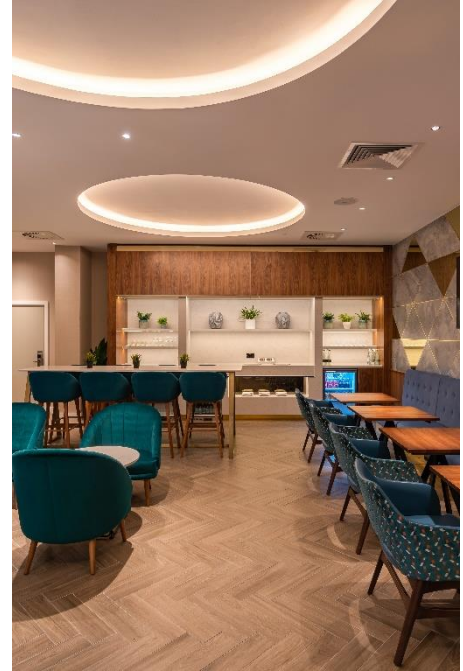

Integrate LED Code	CCT	3.5w/m	10w/m	14.4w/m	16.4w/m	20w/m
		lm/m	lm/m	lm/m	lm/m	lm/m
Pro 95	2200k	220	636	930	1038	1222
Pro 95	2500k	244	704	1030	1150	1352
Pro 95	2700k	297	856	1255	1399	1645
Pro 95	3000k	299	864	1255	1412	1659
Pro 95	3500k	303	876	1270	1430	1683
Pro 95	4000k	311	898	1313	1468	1726

Note: -40% light loss with Opal cover

#### About the Light source:

24v, flexible LED strip with reflective, white surface and 3M adhesive tape on the back. Homogeneous light source for fixtures with Opal covers <15mm from LED to Opal cover. Bridgelux LEDs of the highest quality. 120° beam angle.

“One Bin Only” within 2 MacAdam

Integrated Constant Current technology to guarantee Constant color and Intensity over from first to last LED over lifetime

#### About the Fixtures:

A portfolio of Aluminium Recessed, Surface Mounted, Suspended or Plaster-In profiles, covers and mounting accessories for Interior, Exterior architectural and commercial applications.

(See separate pdf catalogue and specification builder for options)