


Integrate RGB


General Information

- Flexible LED strip IP20
- 24v DC Constant Voltage
- Beam angle: 120°
- RGB
- Increments 62.5mm
- LED Pitch: 10.42mm
- Lifespan L70: ≥ 60,000 hours
- Dimmable – Dali, DMX
- Max Ambient operating temperature 40°C
- Integrate fixtures IP40, IP44
- **5 Year warranty**

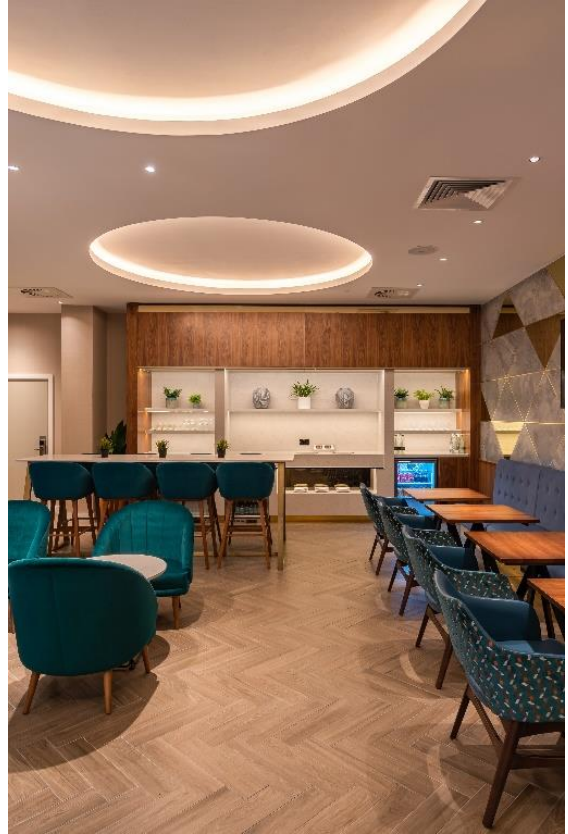

LED Increment 62.5mm LED Pitch 10.42

Integrate LED Code	w/m	lm/m
RGB 17	17	568
RGB 28	28	948

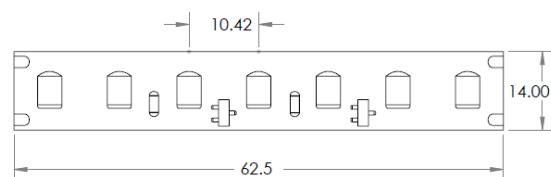

Note: -40% light loss with Opal cover

About the Light source:

24v, flexible LED strip with reflective, white surface and 3M adhesive tape on the back. Homogeneous light source for fixtures with Opal covers <15mm from LED to Opal cover. Bridgelux LEDs of the highest quality. 120° beam angle.

“One Bin Only” within 2 MacAdam

Integrated Constant Current technology to guarantee Constant color and Intensity over from first to last LED over lifetime.

About the Fixtures:

A portfolio of Aluminium Recessed, Surface Mounted, Suspended or Plaster-In profiles, covers and mounting accessories for Interior, Exterior architectural and commercial applications.

(See separate pdf catalogue and specification builder for options)