



Integrate RGB W

General Information


- Flexible LED strip IP20
- 24v DC Constant Voltage
- Beam angle: 120°
- CRI >95
- R9 >90
- Increments 62.5mm
- LED Pitch: 10.42mm
- Lifespan L70: ≥ 36,000 hours
- Dimmable – Dali, DMX
- Max Ambient operating temperature (22w/m 45°C)
- Integrate fixtures IP40, IP44
- **5 Year warranty**

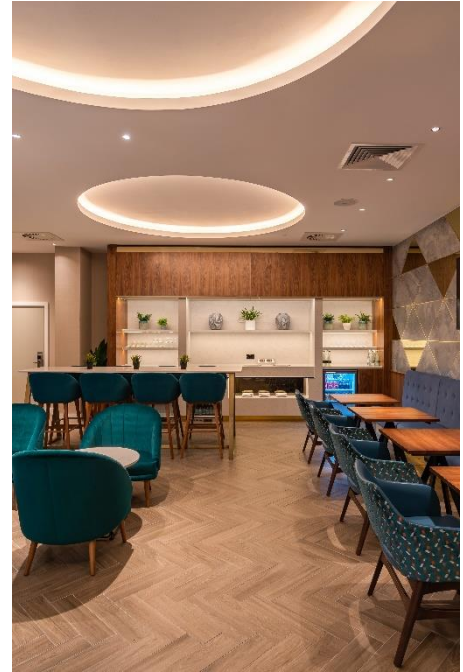

14w & 18w/m LED Increment 100mm LED Pitch 16.6mm

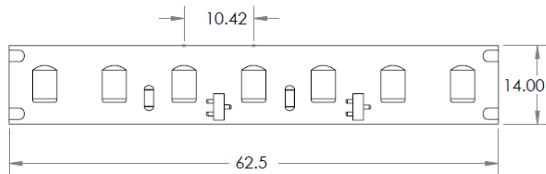

22w/m LED Increment 62.5mm LED Pitch 10.42mm

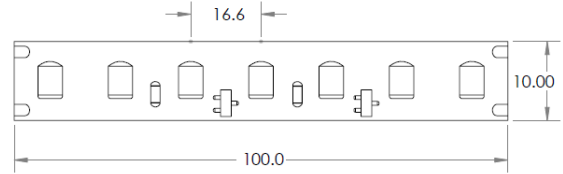

Integrate LED Code	CCT	14w/m	18w/m	22w/m
		lm/m	lm/m	lm/m
RGB W	2400k	360	655	985
RGB W	2700k	391	681	1037
RGB W	3000k	415	700	1068

Note: -40% light loss with Opal cover

About the Light source:

24v, flexible LED strip with reflective, white surface and 3M adhesive tape on the back. Homogeneous light source for fixtures with Opal covers <15mm from LED to Opal cover. Bridgelux LEDs of the highest quality. 120° beam angle.

“One Bin Only” within 2 MacAdam

Integrated Constant Current technology to guarantee Constant color and Intensity over from first to last LED over lifetime.

About the Fixtures:

A portfolio of Aluminium Recessed, Surface Mounted, Suspended or Plaster-In profiles, covers and mounting accessories for Interior, Exterior architectural and commercial applications.

(See separate pdf catalogue and specification builder for options)