


Architectural FX

Integrate NHD TW (Tunable White)

General Information

- Flexible LED strip IP20
- 24v DC Constant Voltage
- Beam angle: 120°
- CRI >85
- R9 >65
- Increments 62.5mm
- LED pitch: 8.93mm (CW-CW, WW-WW)
- Lifespan L80: ≥ 60,000 hours
- Dimmable – DALI, DMX, 0-10v
- Max Ambient operating temperature (12w/m 50°C, 24w/m 40°C, 42w/m 35°C)
- Available IP40, IP44, IP67
- 7 Year warranty (Limited 5,000hrs per year)

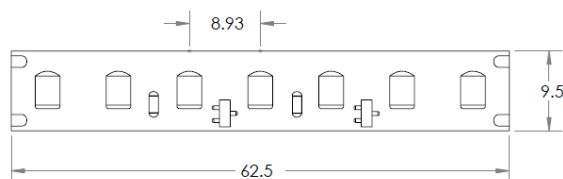

Integrate LED Code	CCT	12w/m lm/m	24w/m lm/m	42w/m lm/m
NHD TW	2200-5000k	Total 1080 2200k @ 490 5000k @ 590	Total 2240 2200k @ 950 5000k @ 1290	Total 4180 2200k @ 1750 5000k @ 2430

Note: -40% light loss with Opal cover

About the Light source:

24v, flexible LED strip with reflective, white surface and 3M adhesive tape on the back. Homogeneous light source for fixtures with Opal covers <15mm from LED to Opal cover. Nichia LEDs of the highest quality. 120° beam angle.

“One Bin Only” within 3 MacAdam.

Integrated Constant Current technology to guarantee Constant color and Intensity over from first to last LED over lifetime

About the Fixtures:

A portfolio of Aluminium Recessed, Surface Mounted, Suspended or Plaster-In profiles, covers and mounting accessories for Interior, Exterior architectural and commercial applications.

(See separate pdf catalogue and specification builder for options)