


# Architectural FX

## Integrate

### Pro 95 240 TW (Tunable White)

#### General Information

- Flexible LED strip IP20
- 24v DC Constant Voltage
- Beam angle: 120°
- CRI >95
- R9 >55
- Increments 50mm
- LED pitch: 4.16mm (CW-CW, WW-WW)
- Lifespan L70: ≥ 50,000 hours
- Dimmable – Mains (Triac) DALI, DMX, 0-10v
- Max Ambient operating temperature (9-19w/m 50°C, 33-48w/m 35°C)
- Available IP40, IP44
- 5 Year warranty

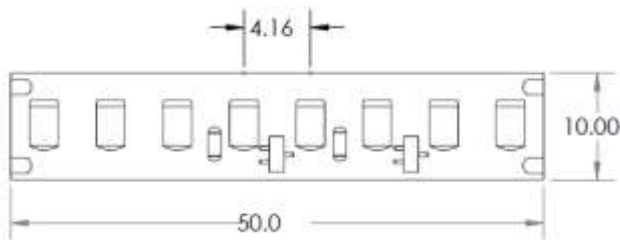

Integrate LED Code	CCT	9w/m	14w/m	19w/m	33w/m	48w/m
		lm/m	lm/m	lm/m	lm/m	lm/m
Pro 90 240 TW	2200-3000k	604	940	1275	2215	3222
Pro 90 240 TW	2200-3500k	635	989	1352	2331	3391
Pro 90 240 TW	2200-4000k	668	1041	1423	2454	3570

Note: -40% light loss with Opal cover

#### About the Light source:

24v, flexible LED strip with reflective, white surface and 3M adhesive tape on the back. Homogeneous light source for fixtures with Opal covers <15mm from LED to Opal cover. Osram LEDs of the highest quality. 120° beam angle.

“One Bin Only” within 3 MacAdam.

Integrated Constant Current technology to guarantee Constant color and Intensity over from first to last LED over lifetime

#### About the Fixtures:

A portfolio of Aluminium Recessed, Surface Mounted, Suspended or Plaster-In profiles, covers and mounting accessories for Interior, Exterior architectural and commercial applications.

(See separate pdf catalogue and specification builder for options)