


LTwo® PENDANT – 25° flood

constant current

25 watt/m

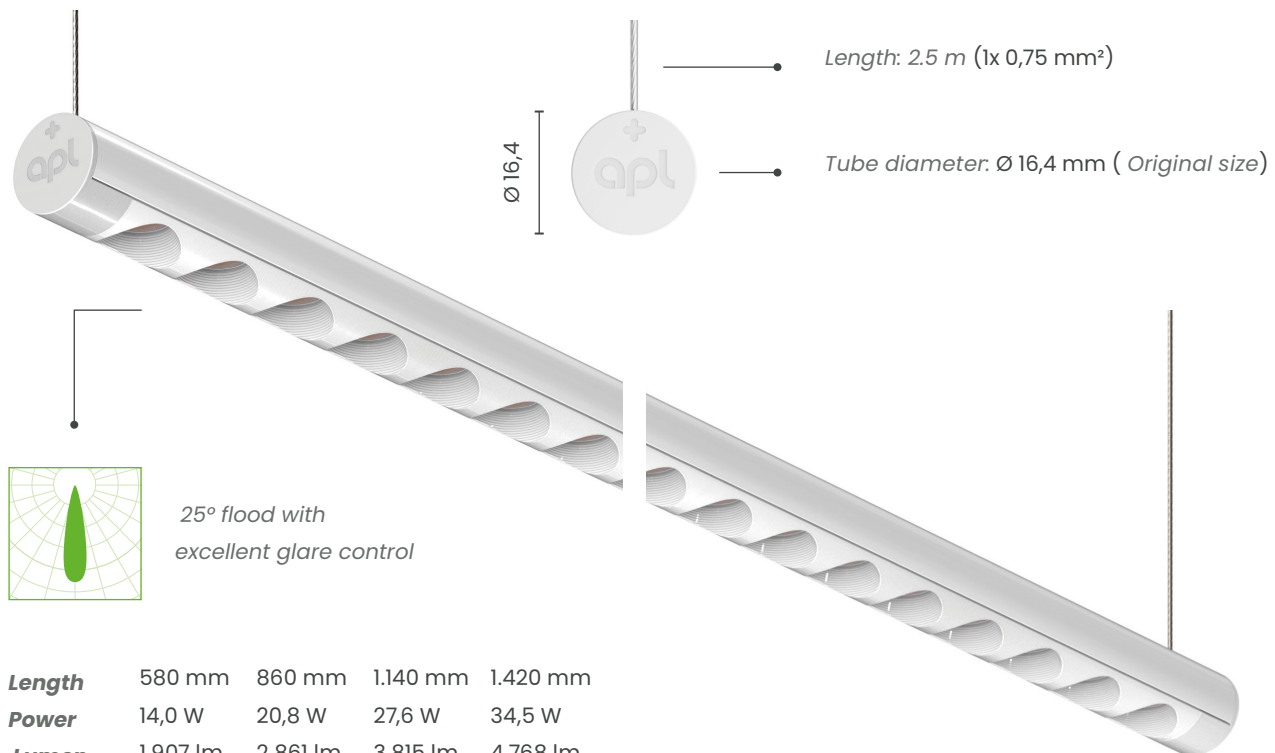

Product description

LTwo® PENDANT – Light Tube with Optics as a pendant lumi-naire. 25° flood optic with max. 4,768 lumen, based on the modular, miniaturised LTwo® light source/luminaire system with 13 high-quality precision optics and extensive accessories for all lighting applications.

The LTwo® PENDANT has decorative wire ropes for suspension and power supply, so no additional power cable is required. The wire rope holders mounted on the ceiling side enable simple and tool-free height adjustment for ideal alignment of the LTwo® PENDANT.

Very environmentally friendly due to minimal use of material (230 g/m), interchangeability, recyclability and high efficiency (up to 193 lm/W). Ideally suited for high-quality architectural lighting indoors.

Product features



Legend

Dimensions

Ø 16,4 mm

Length

580 mm, 860 mm, 1.140 mm, 1.420 mm

Weight

156 g, 208 g, 260 g, 312 g

Housing colour

Weiß / White (WW, RAL9016) & Schwarz / Black (BB, RAL9005)

Wattages

4,0 W; 20,8 W; 27,6 W; 34,5 W

Lumen @ 5.000 K

1.907 lm, 2.861 lm, 3.815 lm, 4.768 lm

Efficiency

138,1 lm/W (WW), 128,9 lm/W (BB)

Light distribution

25° symmetrical

LED quantity 1

6 per 280 mm

UGR (<13)

WW: 12,3 / 12,4 & BB: 7,0 / 4,8 (4H|8H / 70|50|20 / @1.000 lm)

LED Pitch

17,5 mm

CCT / CRI

2.700 K, 3.000 K, 3.500 K, 4.000 K (>90), 5.000 K (>80)

Binning

3 SDCM

Lifetime

60.000 h L80B10

Application

Ideal for a focused, pinpoint lighting to highlight objects or for general lighting with higher ceilings.

Protection

IP40 (Indoor use only)

Risk group (IEC 62471:2006)

RG 0 (2.700 K - 4.000 K) | RG 1 (5.000 K)

Operating mode

Constant current (CC)

Dimmable

Yes

Operating current

580 mm - 1140 mm = max. 600 mA; 1420 mm = max. 750 mA

Housing temperature (Tc)

min. -20°C / max. +80°C

Ambient temperature (Ta)

min. -20°C / max. +35°C

Storage temperature (Ts)

min. -20°C / max. +85°C



Length, lumen, watt

CRI	CCT / Kelvin	Farbe / Color	580 mm 14,0 W (0,6 A x 23 V)	860 mm 20,8 W (0,6 A x 35 V)	1.140 mm 27,6 W (0,6 A x 46 V)	1.420 mm 34,5 W (0,75 A x 46 V)	lm/W
>90	2.700 K	white	1.478 lm	2.216 lm	2.955 lm	3.694 lm	106,9
		black	1.380 lm	2.070 lm	2.759 lm	3.449 lm	99,9
>90	3.000 K	white	1.495 lm	2.243 lm	2.990 lm	3.738 lm	108,2
		black	1.396 lm	2.094 lm	2.792 lm	3.490 lm	101,0
>90	3.500 K	white	1.517 lm	2.276 lm	3.034 lm	3.793 lm	109,8
		black	1.417 lm	2.125 lm	2.833 lm	3.541 lm	102,5
>90	4.000 K	white	1.587 lm	2.381 lm	3.175 lm	3.968 lm	114,9
		black	1.482 lm	2.223 lm	2.964 lm	3.705 lm	107,3
>80	5.000 K	white	1.907 lm	2.861 lm	3.815 lm	4.768 lm	138,1
		black	1.781 lm	2.671 lm	3.562 lm	4.452 lm	128,9

Optical and electronic data have a tolerance of ±10 %.

The TC point must be measured at thermal equilibrium in accordance with IEC EN 60598-1

Light distribution

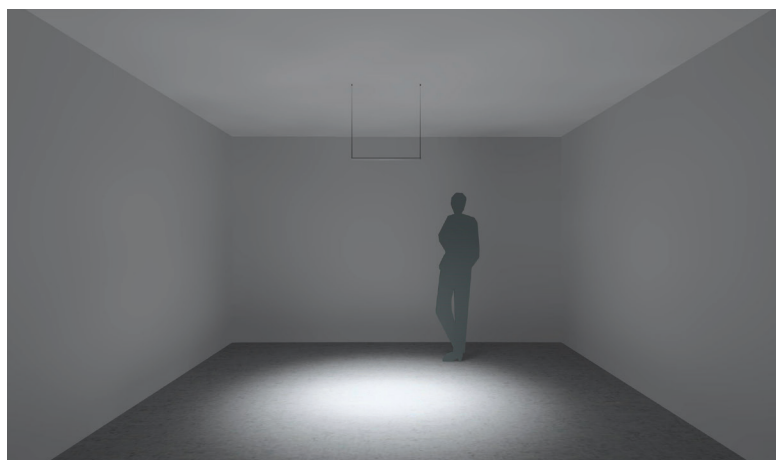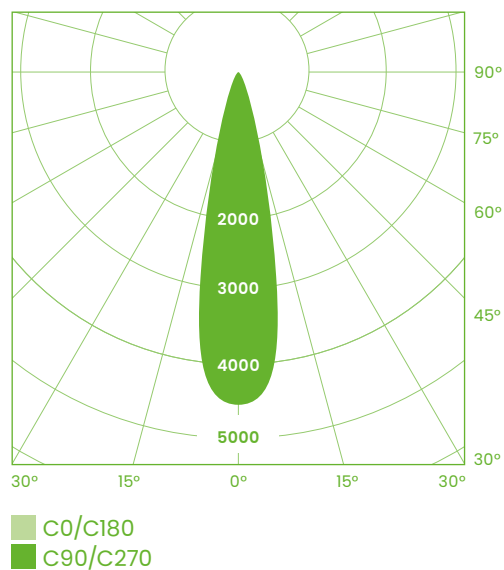

LTwo® PENDANT schwarz / black – 25° flood, 580 mm

Application

Ideal for a focussed, pinpoint lighting to highlight objects or for general lighting with higher ceilings.

Order code

Product	OP	NP	Optic	L	PC	C	LH	IP
APL-LTwoT5	CV	12	10				PD	IP40
				580	927	BB		
				860	930	WW		
				1140	935			
				1420	940			
					850			

OP = Operating mode
 CV = Constant Voltage
 CC = Constant Current
NP = Nominal power per m (W/m)
 12-25 = 12 W/m | 20 W/m | 25 W/m
Optic = Optic (Degree)
 10-60 = 10° HB | 13° | 25° | 40° | 60°
 BWN | BWB = Batwing narrow | Batwing wide
 OVL | WW = Oval | Wall washer
 OP | DF | CL = Opal | Diffus | Klar / Opal | Diffuse | Clear

L = Length (mm)
 580-1420 = 580 mm | 860 mm | 1140 mm | 1420 mm
PC = Photometric code
 927-950 = CRI >90 | CRI >80 | 2.700K | 3.000K | 3.500K | 4.000K | 5.000K
C = Housing colour
 BB | WW = Black | White
LH = Luminaire holder
 PD = Pendant luminaire
IP = Protection class
 IP40 = Indoor use only



Under the following link you will find the tender specification for the product:

<https://apl.ag/products/>

General information about LTwo® applications and accessories

LTwo® is a highly innovative and disruptive light source with a modular character that allows you to use existing accessories, future accessories or accessories developed specifically for your project to open up all kinds of lighting applications, from decorative and accent lighting to task lighting and sophisticated museum lighting or the illumination of concert halls and auditoriums, for example.

LTwo® is available in different lampholder types and connection options. The variant with the magnetic lampholder LTwo® MAG offers the most versatile installation accessories. The product can be easily assembled, swivelled in the lampholder by $\pm 20^\circ$ and held in place with a safety lock. A purely mechanical lampholder (LTwo® MCH) is currently in the design phase. A battery-like lamp holder (LTwo® BATTERY) offers a very cost-effective solution for OEM designs. LTwo® PENDANT is available as a pendant luminaire with current-carrying suspension wires. The 8 mm snap connector with IP67 protection is used for the LTwo® OUTDOOR luminaire.

LTwo® MAGNETIC

LTwo® BATTERY

LTwo® PENDANT

LTwo® OUTDOOR

