


LTwo® PENDANT – 10° high bay

constant voltage

48V – 12 watt/m

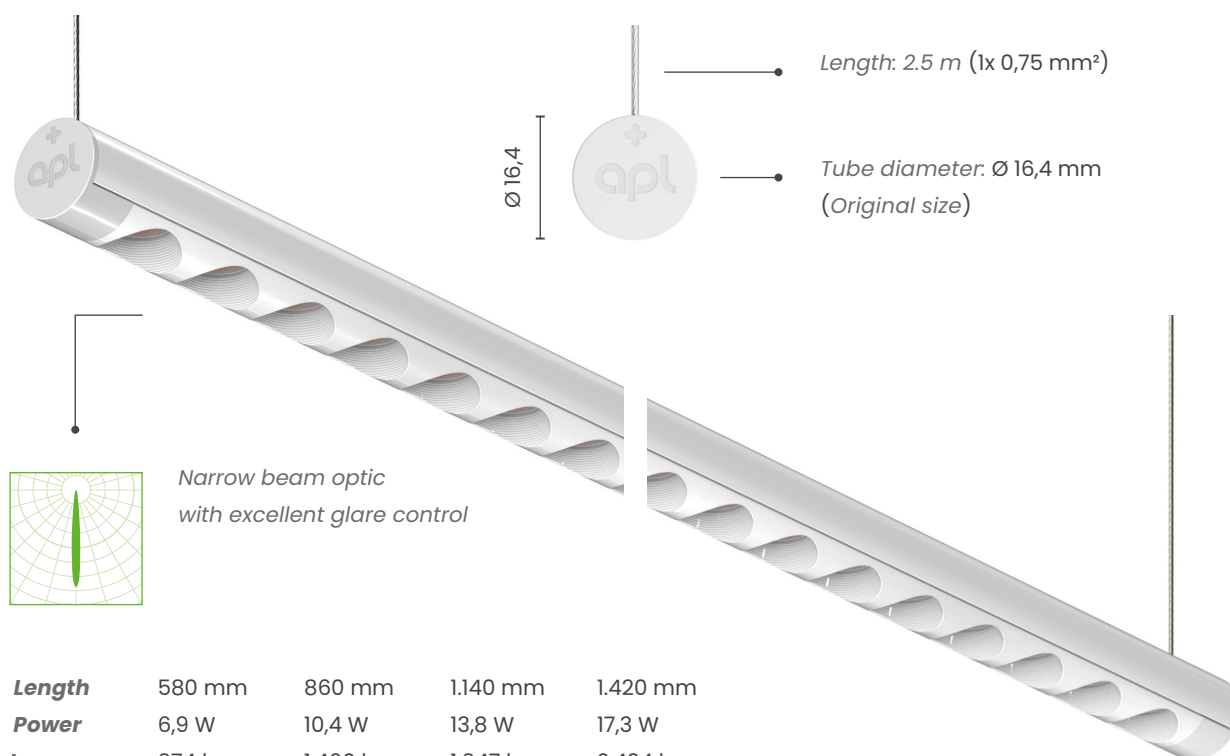


Product description

LTwo® PENDANT – Light Tube with Optics as a pendant lumi-naire. 10° high bay optic with max. 3,851 lumen, based on the modular, miniaturised LTwo® light source/luminaire system with 13 high-quality precision optics and extensive accessories for all lighting applications.

The LTwo® PENDANT has decorative wire ropes for suspension and power supply, so no additional power cable is required. The wire rope holders mounted on the ceiling side enable simple and tool-free height adjustment for ideal alignment of the LTwo® PENDANT.

Very environmentally friendly due to minimal use of material (230 g/m), interchangeability, recyclability and high efficiency (up to 193 lm/W). Ideally suited for high-quality architectural lighting indoors.

Light distribution

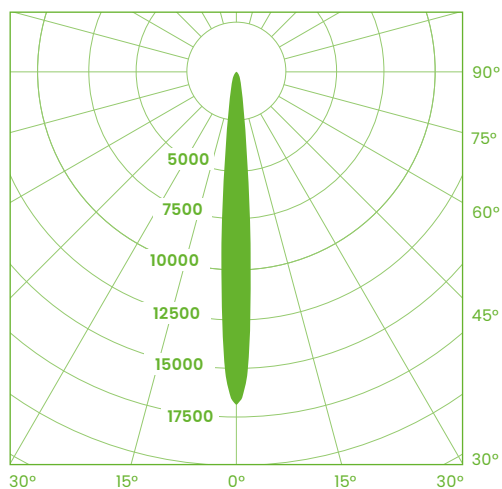

■ C0/C180
■ C90/C270



LTwo® PENDANT *black* – 10° high bay, 580 mm

Application

Ideal for lighting from a great height.

Order code

Product	OP	NP	Optic	L	PC	C	LH	IP
APL-LTwoT5	CV	12	10				PD	IP40
				580	927	BB		
				860	930	WW		
				1140	935			
				1420	940			
					850			

OP = Operating mode
 CV = Constant Voltage
 CC = Constant Current
NP = Nominal power per m (W/m)
 12-25 = 12 W/m | 20 W/m | 25 W/m
Optic = Optic (Degree)
 10-60 = 10° HB | 13° | 25° | 40° | 60°
 BWN | BWW = Batwing narrow | Batwing wide
 OVL | WW = Oval | Wall washer
 OP | DF | CL = Opal | Diffus | Klar / Opal | Diffuse | Clear

L = Length (mm)
 580-1420 = 580 mm | 860 mm | 1140 mm | 1420 mm
PC = Photometric code
 927-950 = CRI >90 | CRI >80 | 2.700K | 3.000K | 3.500K | 4.000K | 5.000K
C = Housing colour
 BB | WW = Black | White
LH = Luminaire holder
 PD = Pendant luminaire
IP = Protection class
 IP40 = Indoor use only



Under the following link you will find the tender specification for the product:

<https://apl.ag/products/>

General information about LTwo® applications and accessories

LTwo® is a highly innovative and disruptive light source with a modular character that allows you to use existing accessories, future accessories or accessories developed specifically for your project to open up all kinds of lighting applications, from decorative and accent lighting to task lighting and sophisticated museum lighting or the illumination of concert halls and auditoriums, for example.

LTwo® is available in different lampholder types and connection options. The variant with the magnetic lampholder LTwo® MAG offers the most versatile installation accessories. The product can be easily assembled, swivelled in the lampholder by $\pm 20^\circ$ and held in place with a safety lock. A purely mechanical lampholder (LTwo® MCH) is currently in the design phase. A battery-like lamp holder (LTwo® BATTERY) offers a very cost-effective solution for OEM designs. LTwo® PENDANT is available as a pendant luminaire with current-carrying suspension wires. The 8 mm snap connector with IP67 protection is used for the LTwo® OUTDOOR luminaire.

LTwo® MAGNETIC

LTwo® BATTERY

LTwo® PENDANT

LTwo® OUTDOOR

