


LTwo® PENDANT – 25° flood

constant voltage

48V – 12 watt/m

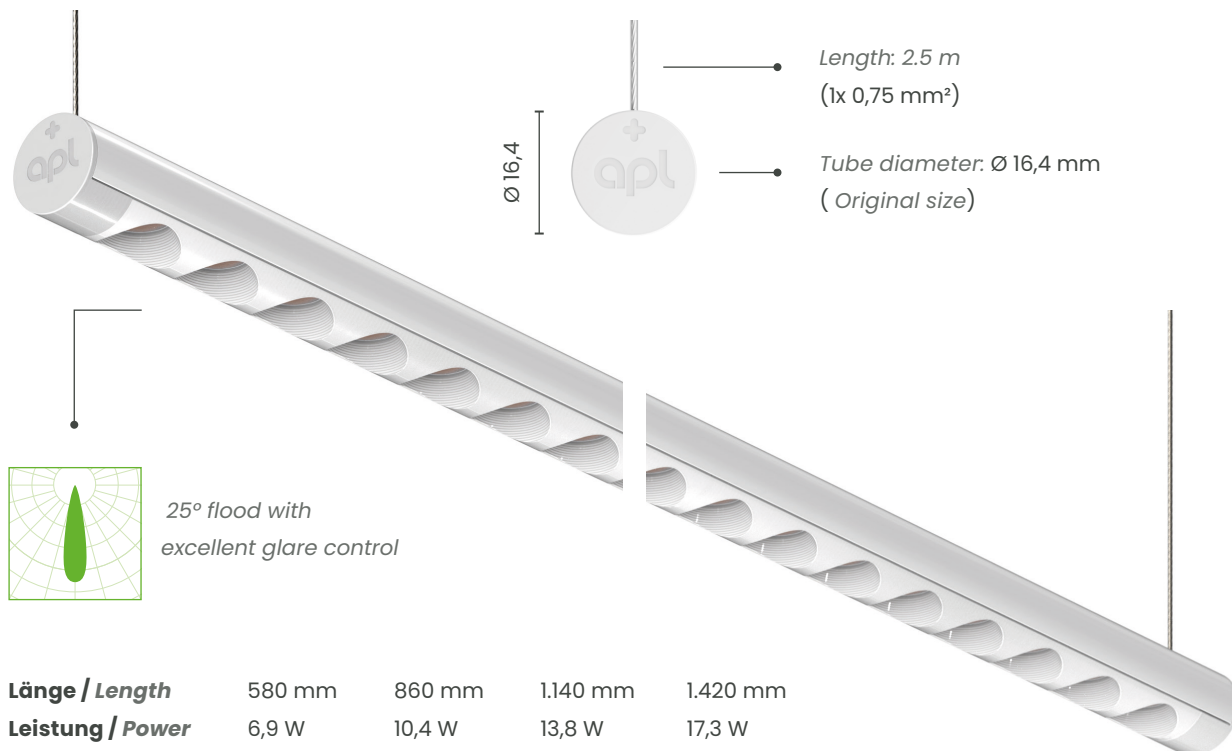

Product description

LTwo® PENDANT – Light Tube with Optics as a pendant lumi-naire. 25° flood optic with max. 3,694 lumen, based on the modular, miniaturised LTwo® light source/luminaire system with 13 high-quality precision optics and extensive accessories for all lighting applications.

The LTwo® PENDANT has decorative wire ropes for suspension and power supply, so no additional power cable is required. The wire rope holders mounted on the ceiling side enable simple and tool-free height adjustment for ideal alignment of the LTwo® PENDANT.

Very environmentally friendly due to minimal use of material (230 g/m), interchangeability, recyclability and high efficiency (up to 193 lm/W). Ideally suited for high-quality architectural lighting indoors.

Product features



Legende / Legend

Dimensions

Ø 16,4 mm

Length

580 mm, 860 mm, 1.140 mm, 1.420 mm

Weight

156 g, 208 g, 260 g, 312 g

Housing colour

White (WW, RAL9016) & Black (BB, RAL9005)

Wattages

6,9 W; 10,4 W;

13,8 W; 17,3 W

Lumen @ 5.000 K

934 lm, 1.401 lm, 1.868 lm, 2.335 lm

Efficiency

135,1 lm/W (WW), 126,2 lm/W (BB)

Light distribution

25° symmetrical

LED quantity

16 per 280 mm

UGR (<13)

WW: 10,6 / 10,7 & BB: 4,5 / 2,4 (4H|8H / 70|50|20 / @1.000 lm)

LED Pitch

17,5 mm

CCT / CRI

2.700 K, 3.000 K, 3.500 K, 4.000 K (>90), 5.000 K (>80)

Binning

3 SDCM

Lifetime

60.000 h L80B10

Application

Ideal for a focused, pinpoint lighting to highlight objects or for general lighting with higher ceilings.

Protection

IP40 (Indoor use only)

Risk group (IEC 62471:2006)

RG 0 (2.700 K – 4.000 K) | RG 1 (5.000 K)

Operating mode

Constant Voltage (CV)

Dimmable

Yes

Operating voltage

48 V DC -1,0 / +1,75

Housing temperature (T_c)

min. -20°C / max. +80°C

Ambient temperature (T_a)

min. -20°C / max. +45°C

Storage temperature (T_s)


min. -20°C / max. +85°C

Length, lumen, watt

CRI	CCT / Kelvin	Farbe / Color	580 mm 6,9 W	860 mm 10,4 W	1.140 mm 13,8 W	1.420 mm 17,3 W	lm/W
>90	2.700 K	white	723 lm	1.085 lm	1.447 lm	1.809 lm	104,7
		black	676 lm	1.013 lm	1.351 lm	1.689 lm	97,7
>90	3.000 K	white	732 lm	1.098 lm	1.465 lm	1.831 lm	105,9
		black	684 lm	1.026 lm	1.367 lm	1.709 lm	98,9
>90	3.500 K	white	745 lm	1.118 lm	1.491 lm	1.864 lm	107,8
		black	696 lm	1.044 lm	1.392 lm	1.740 lm	100,7
>90	4.000 K	white	776 lm	1.164 lm	1.552 lm	1.940 lm	112,3
		black	725 lm	1.087 lm	1.449 lm	1.812 lm	104,8
>80	5.000 K	white	934 lm	1.401 lm	1.868 lm	2.335 lm	135,1
		black	872 lm	1.308 lm	1.744 lm	2.180 lm	126,2

Optical and electronic data have a tolerance of ±10 %.
The TC point must be measured at thermal equilibrium in accordance with IEC EN 60598-1

Light distribution

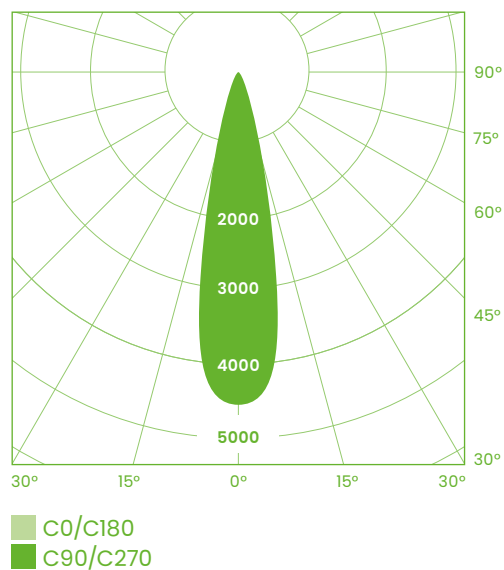

LTwo® PENDANT schwarz / black – 25° flood, 580 mm

Application

Ideal for a focused, pinpoint lighting to highlight objects or for general lighting with higher ceilings.

Order code

Product	OP	NP	Optic	L	PC	C	LH	IP
APL-LTwoT5	CV	12	25				PD	IP40
				580	927	BB		
				860	930	WW		
				1140	935			
				1420	940			
					850			

OP = Operating mode
 CV = Constant Voltage
 CC = Constant Current
NP = Nominal power per m (W/m)
 12-25 = 12 W/m | 20 W/m | 25 W/m
Optic = Optic (Degree)
 10-60 = 10° HB | 13° | 25° | 40° | 60°
 BWN | BWW = Batwing narrow | Batwing wide
 OVL | WW = Oval | Wall washer
 OP | DF | CL = Opal | Diffus | Klar / Opal | Diffuse | Clear

L = Length (mm)
 580-1420 = 580 mm | 860 mm | 1140 mm | 1420 mm
PC = Photometric code
 927-950 = CRI >90 | CRI >80 | 2.700K | 3.000K | 3.500K | 4.000K | 5.000K
C = Housing colour
 BB | WW = Black | White
LH = Luminaire holder
 PD = Pendant luminaire
IP = Protection class
 IP40 = Indoor use only



Under the following link you will find the tender
 specification for the product:
<https://apl.ag/products/>

General information about LTwo® applications and accessories

LTwo® is a highly innovative and disruptive light source with a modular character that allows you to use existing accessories, future accessories or accessories developed specifically for your project to open up all kinds of lighting applications, from decorative and accent lighting to task lighting and sophisticated museum lighting or the illumination of concert halls and auditoriums, for example.

LTwo® is available in different lampholder types and connection options. The variant with the magnetic lampholder LTwo® MAG offers the most versatile installation accessories. The product can be easily assembled, swivelled in the lampholder by $\pm 20^\circ$ and held in place with a safety lock. A purely mechanical lampholder (LTwo® MCH) is currently in the design phase. A battery-like lamp holder (LTwo® BATTERY) offers a very cost-effective solution for OEM designs. LTwo® PENDANT is available as a pendant luminaire with current-carrying suspension wires. The 8 mm snap connector with IP67 protection is used for the LTwo® OUTDOOR luminaire.

LTwo® MAGNETIC

LTwo® BATTERY

LTwo® PENDANT

LTwo® OUTDOOR

