


# LTwo® MAG – 40° flood

## constant voltage 48V – 12 watt/m



reddot winner 2023

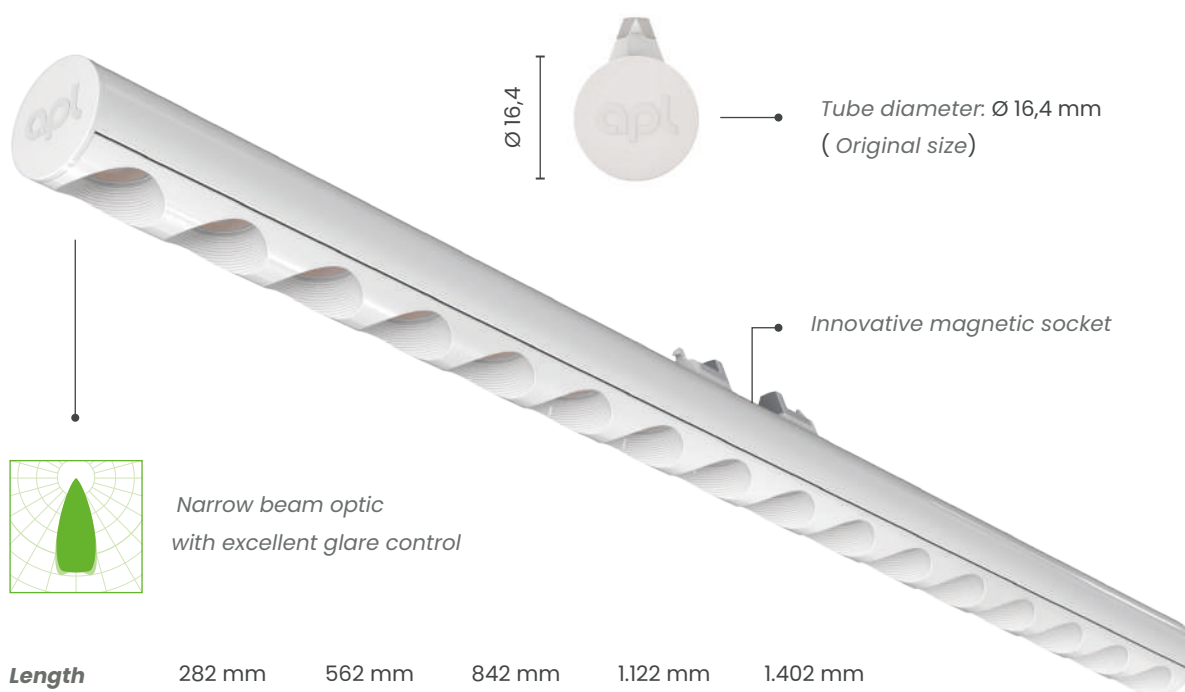

|               |        |        |          |          |          |
|---------------|--------|--------|----------|----------|----------|
| <b>Length</b> | 282 mm | 562 mm | 842 mm   | 1.122 mm | 1.402 mm |
| <b>Power</b>  | 3,5 W  | 6,9 W  | 10,4 W   | 13,8 W   | 17,3 W   |
| <b>Lumen</b>  | 465 lm | 930 lm | 1.395 lm | 1.860 lm | 2.325 lm |

### Product description

LTwo® – Light Tube with Optics. 40° flood optic with max. 3,678 lumen, based on the modular, miniaturised LTwo® light source/ luminaire system with 13 high-quality precision optics and extensive accessories for all lighting applications. With newly developed, multifunctional lamp/luminaire holder for easy, tool-free, magnetic installation and angle adjustment in +/-20°, as well as locking. Coded socket for safe operation of lamp luminaires with different operation modes in Constant Voltage or Constant Current. Very environmentally friendly due to minimal use of material (180g/m), interchangeability, recyclability and high efficiency (up to 193 lm/W). Ideally suited for building and material integration as well as the construction of luminaires or use with a wide range of accessories from apl.

## Product features



Legende / Legend

### Dimensions

Ø 16,4 mm

### Length

282 mm, 562 mm, 842 mm, 1.122 mm, 1.402 mm

### Weight

56 g, 108 g, 160 g, 212 g, 264 g

### Housing colour

Weiß / White (WW, RAL9016) &amp; Schwarz / Black (BB, RAL9005)

### Wattages

3,5 W; 6,9 W; 10,4 W; 13,8 W; 17,3 W

### Lumen @ 5.000 K

465 lm, 930 lm, 1.395 lm, 1.860 lm, 2.325 lm

### Efficiency

134,5 lm/W (WW), 121,4 lm/W (BB)

### Light distribution

40° symmetrical

### LED quantity

16 per 280 mm

### UGR (<16)

WW: 12,9 / 13,2 &amp; BB: 8,3 / 8,0 (4H|8H / 70|50|20 / @1.000 lm)

### LED Pitch

17,5 mm

### CCT / CRI

2.700 K, 3.000 K, 3.500 K, 4.000 K (&gt;90), 5.000 K (&gt;80)

### Binning

3 SDCM

### Lifetime

60.000 h L80B10

### Application

Ideal for illuminating specific areas without scattering the light too much. It is used to create accent lighting or for higher ceilings.

### Protection

IP40 (Nur für Innenräume / Indoor use only)

### Risk group (IEC 62471:2006)

RG 0 (2.700 K – 4.000 K) | RG 1 (5.000 K)

### Operating mode

Constant Voltage (CV)

### Dimmable

Yes

### Operating voltage

48 V DC -1,0 / +1,75

### Housing temperature (T<sub>c</sub>)

min. -20°C / max. +80°C

### Ambient temperature (T<sub>a</sub>)

min. -20°C / max. +45°C

### Storage temperature (T<sub>s</sub>)

min. -20°C / max. +85°C



## Length, lumen, watt

| CRI | CCT / Kelvin | Farbe / Color | 282 mm<br>3,5 W | 562 mm<br>6,9 W | 842 mm<br>10,4 W | 1.122 mm<br>13,8 W | 1.402 mm<br>17,3 W | lm/W  |
|-----|--------------|---------------|-----------------|-----------------|------------------|--------------------|--------------------|-------|
| >90 | 2.700 K      | white         | 360 lm          | 720 lm          | 1.080 lm         | 1.441 lm           | 1.801 lm           | 104,2 |
|     |              | black         | 325 lm          | 650 lm          | 975 lm           | 1.300 lm           | 1.624 lm           | 94,0  |
| >90 | 3.000 K      | white         | 365 lm          | 729 lm          | 1.094 lm         | 1.458 lm           | 1.823 lm           | 105,5 |
|     |              | black         | 329 lm          | 658 lm          | 986 lm           | 1.315 lm           | 1.644 lm           | 95,1  |
| >90 | 3.500 K      | white         | 371 lm          | 742 lm          | 1.113 lm         | 1.484 lm           | 1.855 lm           | 107,4 |
|     |              | black         | 335 lm          | 669 lm          | 1.004 lm         | 1.339 lm           | 1.674 lm           | 96,9  |
| >90 | 4.000 K      | white         | 386 lm          | 773 lm          | 1.159 lm         | 1.545 lm           | 1.932 lm           | 111,8 |
|     |              | black         | 349 lm          | 697 lm          | 1.046 lm         | 1.394 lm           | 1.743 lm           | 100,8 |
| >80 | 5.000 K      | white         | 465 lm          | 930 lm          | 1.395 lm         | 1.860 lm           | 2.325 lm           | 134,5 |
|     |              | black         | 419 lm          | 839 lm          | 1.258 lm         | 1.678 lm           | 2.097 lm           | 121,4 |

Optical and electronic data have a tolerance of ±10 %.

The TC point must be measured at thermal equilibrium in accordance with IEC EN 60598-1

## Light distribution

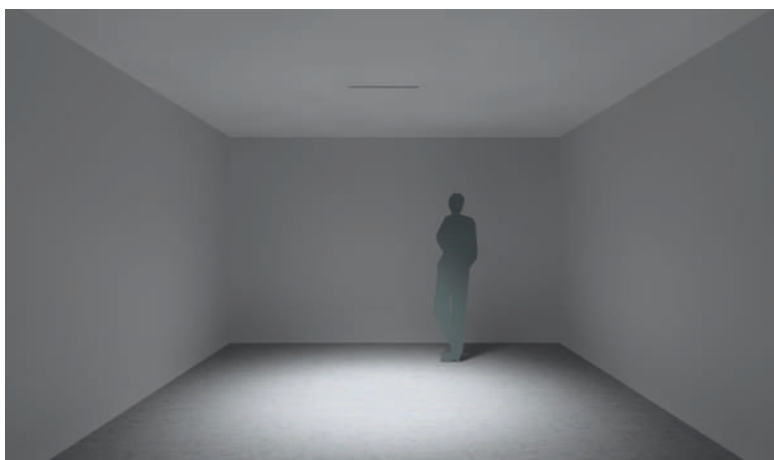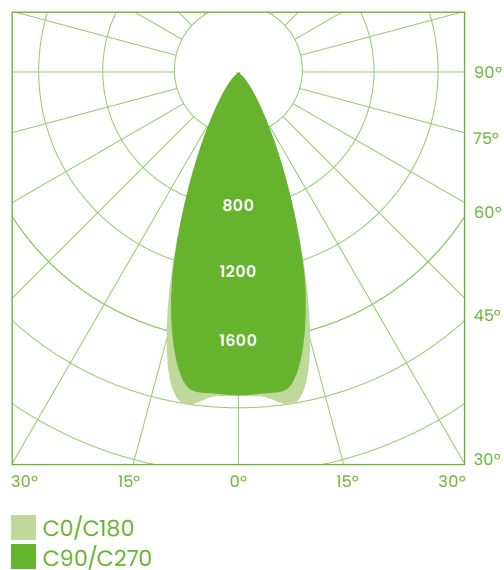

LTwo® schwarz / black – 40° flood, 562mm

### Application

Ideal for illuminating specific areas without scattering the light too much. It is used to create accent lighting or for higher ceilings.

## Order code

| Product    | OP | NP | Optic | L    | PC  | C  | LH  | IP   |
|------------|----|----|-------|------|-----|----|-----|------|
| APL-LTwoT5 | CV | 12 | 10    |      |     |    | MAG | IP40 |
|            |    |    |       | 282  | 927 | BB |     |      |
|            |    |    |       | 562  | 930 | WW |     |      |
|            |    |    |       | 842  | 935 |    |     |      |
|            |    |    |       | 1122 | 940 |    |     |      |
|            |    |    |       | 1402 | 850 |    |     |      |


**OP** = Operating mode  
 CV = Constant Voltage  
 CC = Constant Current  
**NP** = Nominal power per m (W/m)  
 12-25 = 12 W/m | 20 W/m | 25 W/m  
**Optic** = Optic (Degree)  
 10-60 = 10° HB | 13° | 25° | 40° | 60°  
 BWN | BW = Batwing narrow | Batwing wide  
 OVL | WW = Oval | Wall washer  
 OP | DF | CL = Opal | Diffuse | Clear

**L** = Length (mm)  
 142-1402 = 142 mm | 82 mm | 62 mm | 42 mm | 122 mm | 402 mm  
**PC** = Photometric code  
 927-950 = CRI >90 | CRI >80 | 2.700K | 3.000K | 3.500K | 4.000K | 5.000K  
**C** = Housing colour  
 BB | WW = Black | White  
**LH** = Luminaire holder  
 MAG = Magnetic luminaire holder  
**IP** = Protection class  
 IP40 = Indoor use only



Under the following link you will find the tender  
 specification for the product:  
<https://apl.ag/products/>

## LTwo® accessories

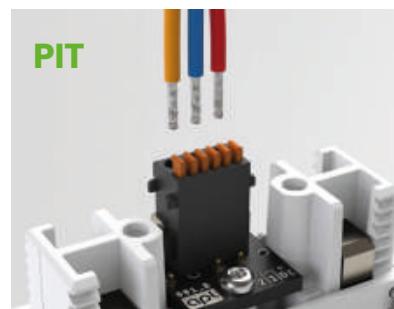

### LTwo® magnetic lampholder

The "LTwo® magnetic lamp holder" is required to operate the LTwo®. Select the "PIT block" variant to connect the lamp holder to the ballast with its own cable. If you prefer a plug-in solution, then select the "JST" variant. To connect this variant to the ballast, the "3-pole cable set with JST" is required. Alternatively, you can choose a pre-wired ballast, in which the cable set is already permanently connected to the ballast. There are a wide range of accessories for mounting the lamp holder. Please refer to our accessories catalog. The accessories are optimized to realize your own lighting project and to easily integrate the LTwo® into all types of materials or the building.



### LTwo® to use in track lighting systems

In existing track lighting systems, use the Lumami® TRACK. No further accessories are required here.




**LTwo® as linear Downlight** To use the LTwo as a linear downlight from the standard mounting holes, use Lumami® DOWNLIGHT.



### LTwo® to use in apl luminaires

If you choose an apl luminaire (e.g. Lumami® DESK), no further accessories are required.



**LTwo® into your project** Please contact us at the following service address. We will be happy by integrating LTwo® in your project.  
info@apl.ag