


# Integrate Slim

## General Information

- Flexible LED strip IP20
- 24v DC Constant Voltage
- Beam angle: 120°
- CRI >90
- R9 >65
- Increments 27.78mm
- LED Pitch: 3.4mm  
LED Increment and pitch dependent on Power p/m
- Lifespan L70: ≥ 50,000 hours
- Dimmable – Mains (Triac) DALI, DMX, 0-10v
- Max Ambient operating temperature 50°C
- Integrate fixtures IP40, IP44
- For use with Slim series profiles only
- 6/6, 8/9, 21/9, 8A8
- 5 Year warranty

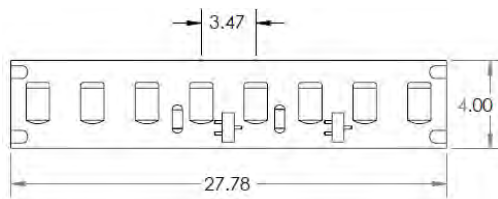

Integrate LED Code	CCT	4w/m	6w/m	9w/m
		lm/m	lm/m	lm/m
SL	2200k	333	500	720
SL	2350k	347	520	750
SL	2500k	360	540	810
SL	2700k	400	600	900
SL	3000k	420	630	945
SL	4000k	433	650	960

Note: -40% light loss with Opal cover

### About the Light source:

24v, flexible LED strip with reflective, white surface and 3M adhesive tape on the back. Homogeneous light source for Slim series fixtures  
Bridgelux LEDs of the highest quality. 120° beam angle.

“One Bin Only” within 3 MacAdam

Integrated Constant Current technology to guarantee Constant color and Intensity over from first to last LED over lifetime

### About the Fixtures:

A portfolio of Aluminium Recessed, Surface Mounted, Suspended or Plaster-In profiles, covers and mounting accessories for Interior, Exterior architectural and commercial applications.

(See separate pdf catalogue and specification builder for options)