

ARCHITECTURAL FX

Technicians of Light

240-24v DC Power Supply
Recommended to load
90% of max power ECP
or HLG Series

100-277v AC

Power supply to
always dictate connected
load of product subject to
max output of interface.

DALI BUS

DALI +
DALI -

VDC +
VDC -


240-24v DC / DALI 2
Power Supply
Recommended to load to
90% of max power

Single channel Dali output

LED supply +
LED supply -

Connector block or
Junction box for
parallel wiring

Pay Attention to product polarity and
terminal positions prior to connection

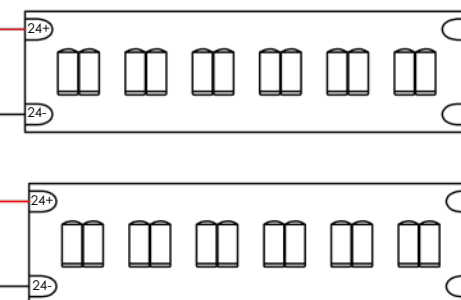

LED to max length determined by w/m

Note:

To avoid excess volt drop and determine max
distance between Power Supply/Interface Unit and
fixture refer to Cable size and distance chart

IF ANYTHING ON THIS DRAWING IS NOT CLEAR, PLEASE CONTACT ARCHITECTURAL FX