

# ARCHITECTURAL FX

Technicians of Light

## Platin Select TVQ (Top Bend) Tunable White IP68



### General Information

Flexible LED strip sealed in UV, chlorine, saltwater and solvent-resistant white Silicon, for indoor and outdoor use

12w, 84 LED, 360 lumens per m

Tunable White 1900-5700k, 2500-5000k, 2000-3200k (Finished CCT)

CRI >80

Cuttable every 83.3mm or 7 LEDs

LED spacing: 11.9 mm

Width 16mm x Height 17mm

Bending diameter: 300mm

Max Single length 10m, in-feeder connector and an end cap as provided

Customized length with sealed connectors on request.

Constant light output and extended lifetime due to an integrated constant current source on the circuit board.

### Electrical & output data

Input Voltage 24 Volt DC Constant Voltage (23 V min, 25 V max)

Ambient operating Temperature range: -45 to +70 °C

Storage temperature Ts min = -30°C, Ts max = 85°C

Dimmable – Mains (Triac), 0-10v, Dali, DMX

Protected against electrostatic discharge +/- 2,000 V

### Lifetime and Warranty (See full Architectural FX total system warranty for more detail)

Lifespan L70: 50,000 hours

Product availability lifetime – 3 years from last order

End of Lifetime guarantee 5 years

The above data are typical values. Due to tolerances in the production process and electrical components, values for light output and electrical power can vary up to 10%.




Energy efficiency class **B**

Generic Product	Product Type	Bend Orientation	Colour (Finished CCT)	w/m	Mounting Accessory	Cable Entry
Platin	Select	Top	1900-5700k	12w	MC - 50mm Clip	End (Standard)
Platin	Select	Top	2500-5000k	12w	MP – Mounting Profile	Side Left - SL
Platin	Select	Top	2000-3200k	12w		Side Right – SR
						Rear - R

**Example:**

**Platin Select TVQ 1900-5700 12w MC E (Custom length to suit project to be advised)**

**Customized length with sealed connectors on request.**

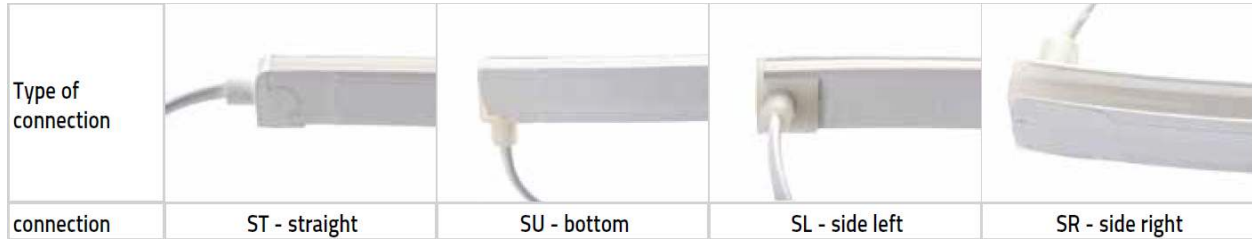

**\*IP20 quick connects available, along with quick seal end entry connections from stock**

**Compatible Accessories (See Accessories data sheet for full details)**



**Note: Do not twist or bend against bend orientation on install**

